


No nickel involved & Increased  
life with 25% stronger ratchet.




PERPETUAL MOTION  
MACHINE FOR  
STRAPPING HEAVY  
PACKAGES!

 **JOSEF KIBLBERG**



**Tighten, punch-seal and cut in one go**  
With the JK1219 you secure the strap with a couple of easy movements, saving time and trouble.

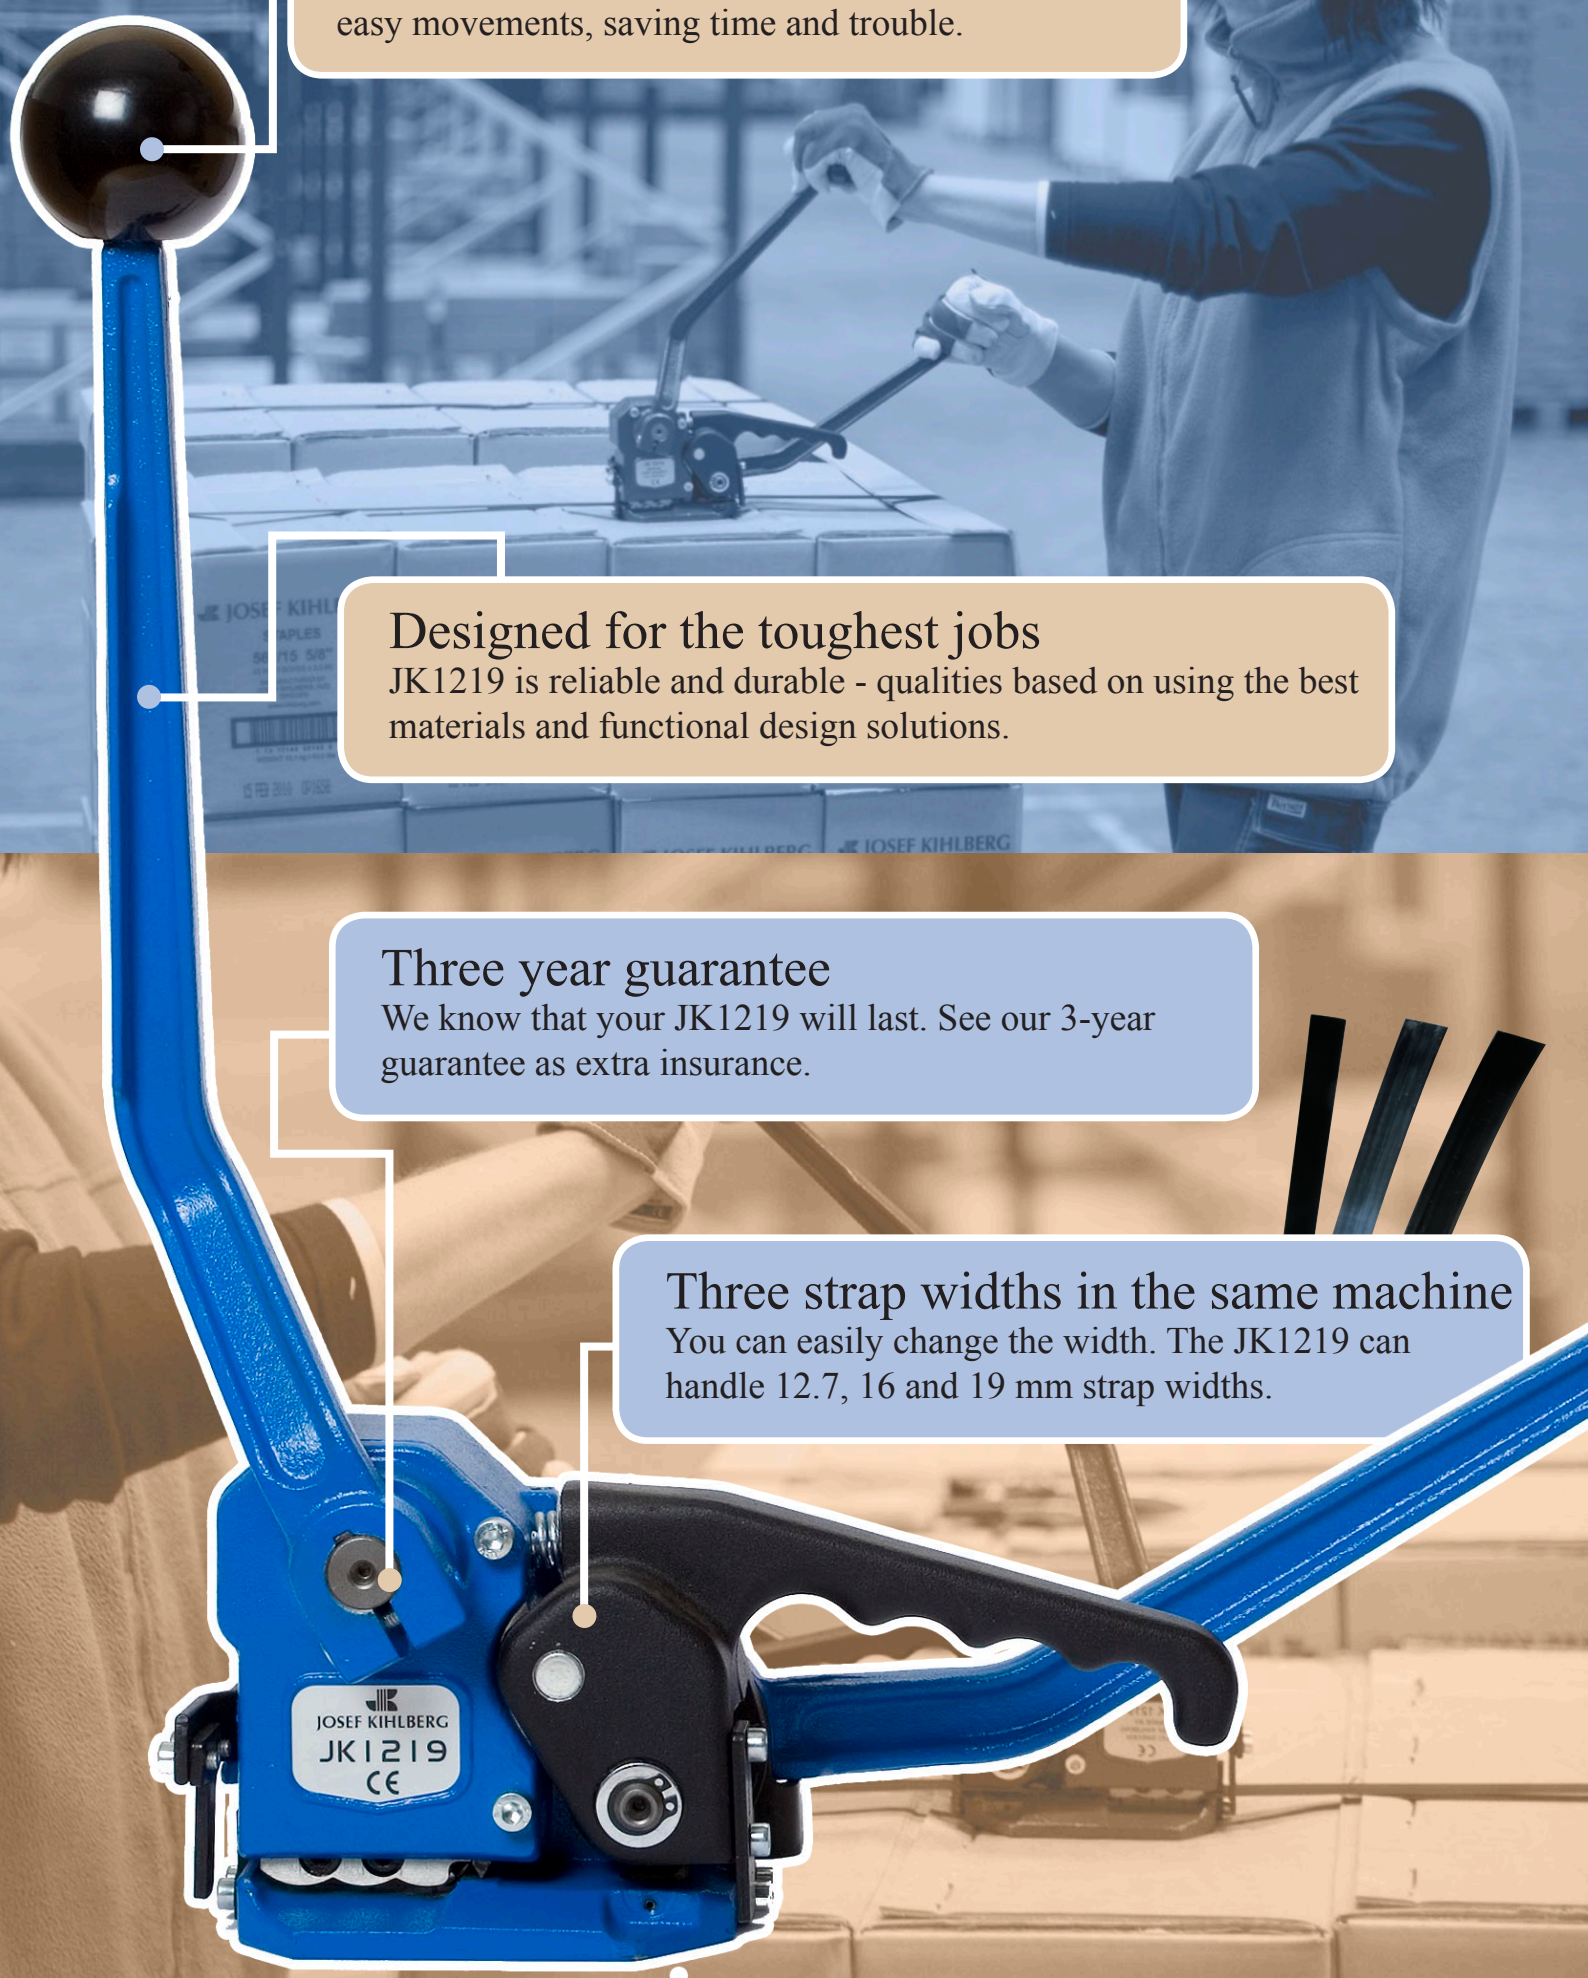


**Designed for the toughest jobs**  
JK1219 is reliable and durable - qualities based on using the best materials and functional design solutions.

**Three year guarantee**  
We know that your JK1219 will last. See our 3-year guarantee as extra insurance.

**Three strap widths in the same machine**  
You can easily change the width. The JK1219 can handle 12.7, 16 and 19 mm strap widths.

  
JOSEF KIHMBERG  
JK1219  
CE

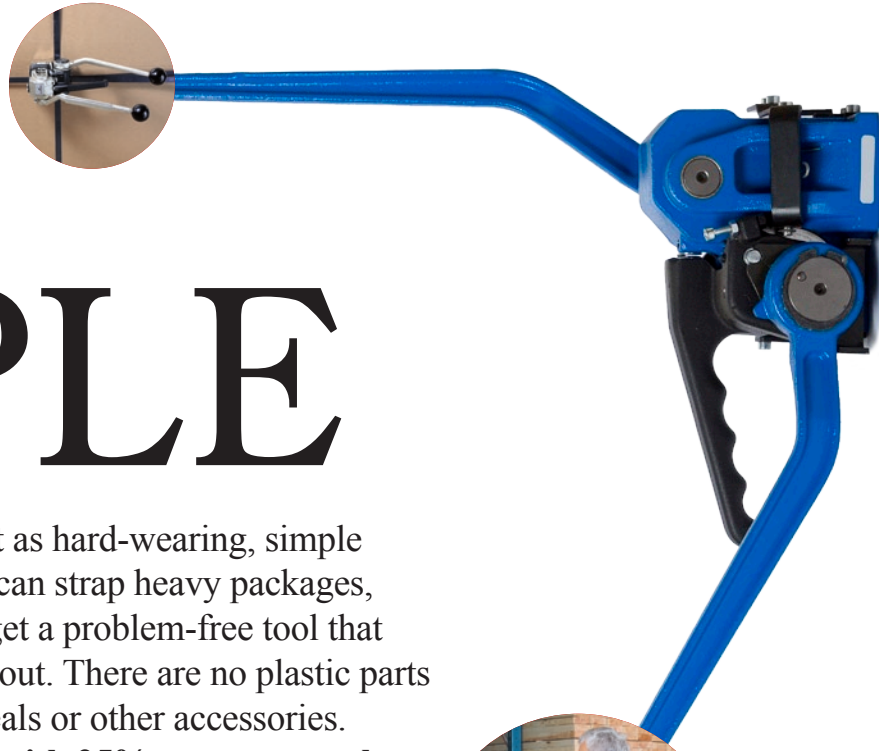

# SIMPLE

Our JK1219 steel strapping tool is just as hard-wearing, simple and easy to use as it needs to be! You can strap heavy packages, both horizontally and vertically. You get a problem-free tool that just keeps on going - year in and year out. There are no plastic parts to split or break and you don't need seals or other accessories.

**No nickel involved & Increased life with 25% stronger ratchet.**



Strap edge automatically curved inwards



Secure sealing

Can be re-tensioned

With a JK1219 the strap's secured in a few seconds. The punched strap edge is automatically curved inwards, to prevent gashes. You can apply up to 5000 N tension, equivalent to a weight of more than 500 kg.



Since seals aren't needed to secure the strap, it's also easy to check that the strap has the correct joint and profile. If for any reason the package moves and slackens the strap, you can also re-tighten it. You never need to put on a new strap!

The JK1219 is easily reset for three different strap widths: 12.7, 16 and 19 mm. There are two types of wheeled strap dispenser.



**Three simple movements and you're done!**

- Open the tool and insert the strap.
- Pull the strap to the required tension.
- Punch-seal and cut - in one go!

# JK1219

# TECHNICAL FACTS

Length	375 mm
Height	185 mm
Weight	4.5 kg
Tension	5 000 N
<b>Guarantee</b>	<b>3 år</b>
Strap quality	90 kp/mm <sup>2</sup> = 128 000 psi
<i>Strap quality (HT model)</i>	<i>105 kp/mm<sup>2</sup> = 149 000 psi</i>
Strap widths	12.7, 16 eller 19 mm
Strap thickness	0.40 - 0.64 mm
Ordering number	129000
<i>Ordering number (HT model)</i>	<i>129009</i>

JK1219




Model	JK-OSC
Length	430 mm
Height	930 mm
Width	650 mm
Weight	30 kg.
Oscillated wound strapping coils	10-19 mm
Ordering number	123197



Model	JK-ENK
Length	1000 mm
Height	680 mm
Width	420 mm
Weight	9.5 kg.
Strapping single spool	10-19 mm
Ordering number	129002

Dispenser

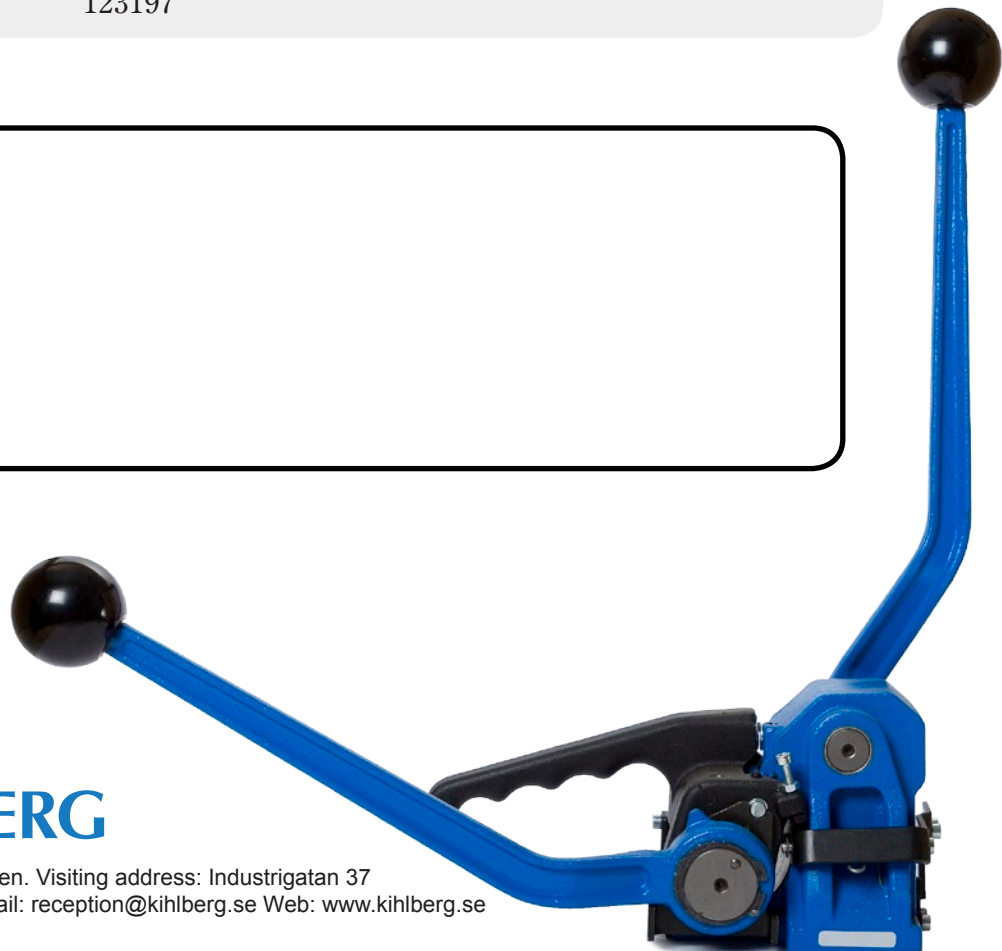

**JOSEF KIHMBERG**

Josef Kihlberg AB, Box 126, 544 22 HJO, Sweden. Visiting address: Industrigatan 37  
Tel: +46 503 328 00. Fax: +46 503 328 01. E-mail: reception@kihlberg.se Web: www.kihlberg.se